

LD310, LD1000, & LDRA6

Zone Leak Detection Controllers



LD310, LD1000, and LDRA6 control panels continuously monitor up to 1,000 ft. (300 ft. for the LD310) of SC detection cable per zone. If the cable detects fluid at any point along its length, the detection panel illuminates the corresponding zone LED, clearly indicating which zone is affected. An alarm (visual for LD310, audible for all others) signals the presence of a leak. Additionally, if the cable loses continuity, the panel will activate a cable fault LED. The detection sensitivity can be set independently for each zone. A summary alarm relay output is standard.

The LDRA6 can interface with a computer via an RS-232 port, through which 117 days of cable current level readings and the last 100 alarms can be accessed for analysis. The LDRA6 also offers a Modbus slave port allowing other devices to communicate with it.

SPECIFICATIONS

Input Power: LD310 LD1000 LDRA6	5 Vdc ±10% 24 Vac/dc (±10%)@300 mA max. (AC: 50/60 Hz) 24 Vac/dc (±10%)@600 mA max. (AC: 50/60 Hz)
Relay Output: LD310	2 Form C relays (leak and fault); 1 A@24 Vdc, 0.5 A resistive@120 Vac
LD1000	2 Form C relays (leak and fault); 1 A@24 Vdc, 0.5 A resistive@120 Vac
LDRA	1 Form C summary alarm relay, 1 Form C relay for each zone/alarm; 1 A@24 Vdc, 0.5 A Resistive@120 Vac

INPUTS

Water Leak Detection Cable	Requires 15 ft. (4.5 m) leader cable kit (LC-Kit) per zone.
Maximum Cable Length: LD310 LD1000, LDRA6	300 ft. (91 m) 1000 ft. (305 m)
Detection Response Time: LD310 LD1000 LDRA6	< 20 sec (10 sec typical) Configurable for 10 sec or 2 min, ± 10% 20 to 3600 sec, software adjustable in 10 sec increments, ± 2%

COMMUNICATION PORTS (LDRA6 ONLY)

RS-232 & RS-485	1200, 2400, 9600, or 19200 selectable; no parity; 8 data bits, 1 stop bit
Terminal Emulation (RS-232)	VT100 Compatible (configuration)
Modbus (RS-485) (LDRA6 only)	Slave; RTU Mode; Supports function codes 03, 04, 06 and 16

Application flexibility

Monitor up to 1,000 ft. (300 m) of water leak detection cable per zone with the LD1000 and LDRA6 or 300 ft. per zone with the LD310

LED indicators

Two LED indicators per zone, for easy troubleshooting...leak and cable fault (LD1000 and LDRA6)

Sensitivity settings

Sensitivity settings for each zone reduce false alarms...maximum detection accuracy

APPLICATIONS

- Monitoring data centers, computer room under-floor areas, mechanical rooms, and electrical control centers
- Monitoring plumbing
- Monitoring chilled beams
- Monitoring chemical/fuel storage
- Protecting records storage

Output versatility

Alarm and trend logs of the last 100 alarms and 117 days of cable current levels, plus RS-232 and Modbus RS-485 ports (LDRA6 only)

Fast response

Summary alarm relay output...fast response

NOTIFICATION

Alarm Notification: Audible Alarm LD1000 LDRA6	85 dBA@2 ft. (0.6 m) 85dBA@2 ft. (0.6 m) re-sound disabled, 8, 16, or 24 hrs.
Push Buttons: LD1000, LDRA6	1 for reset, quiet, and test

OPERATING ENVIRONMENT

Temperature	0 to 50 °C (32 to 122 °F)
Humidity	5% to 95% RH non-condensing
Altitude	15,000 ft. (4,572 m) max
Storage Environment	-20 to 70 °C (-4 to 158 °F)
Weight: LD310 LD1000 LDRA6	3 oz. (85 g) 27 oz. (766 g) 4 lbs. (2 kg)

AGENCY APPROVALS

Agency Approvals: LD310 LD1000 LDRA6	CE, RoHS compliant CE, ETL listed; conforms to UL 61010-1, RoHS compliant CE ETL Listed; conforms to UL 61010-1, EN 61010-1, CAN/CSA C22.2 No. 1010.1, RoHS compliant
---	---


WARRANTY

Limited Warranty	2 years
------------------	---------




LD310

Wiring Diagram

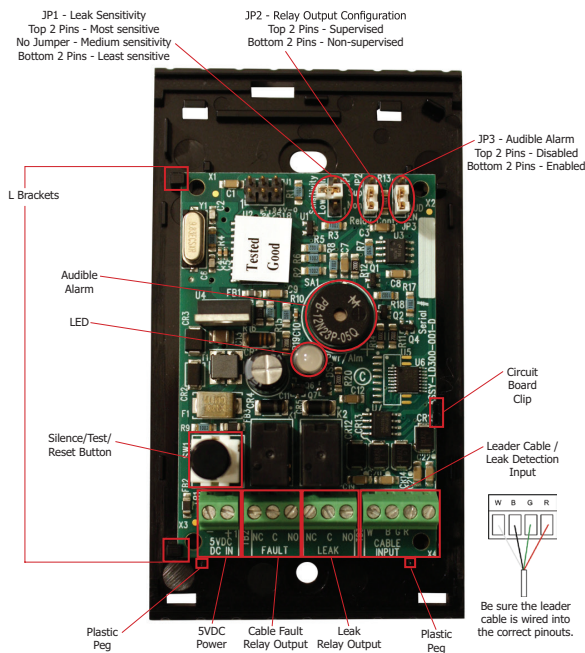

LD310 OR LD1000 BASIC INSTALLATION WITH SC SENSING CABLE AND SD-Z SPOT DETECTOR

Wiring Diagram

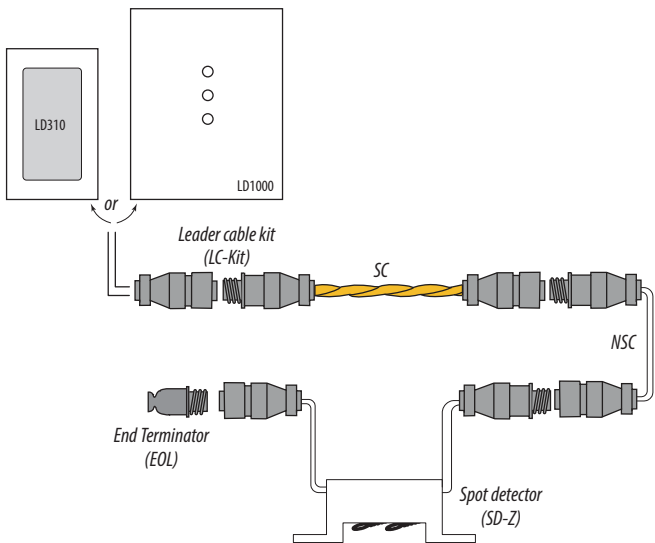


BLINK CODE KEY

MODEL	LED INDICATION	DEVICE STATUS
LD310	Solid green (on or off)	Normal operation
LD310	Flashing green (0.5 sec on/2.5 sec off)	Cable fault
LD310	Flashing green (0.5 sec on/0.5 sec off)	Leak detected
LD1000	Solid green (on or off)	Normal operation
LD1000	1 amber	Cable fault
LD1000	1 red	Leak detected
LDRA6	Solid green (on or off)	Normal operation
LDRA6	1 green	Power on
LDRA6	1 red	Leak detected
LDRA6	1 yellow	Cable fault


LD310

Dimensional Drawing

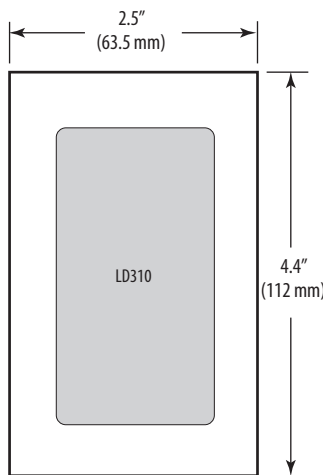


LD1000

Dimensional Drawing

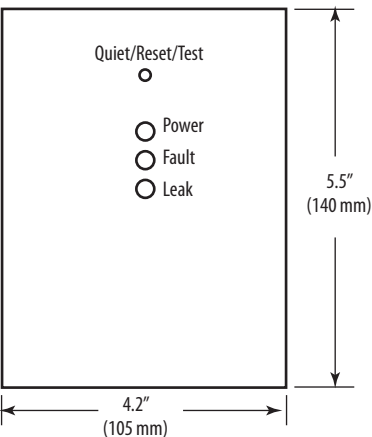

LDRA6

Dimensional Drawing

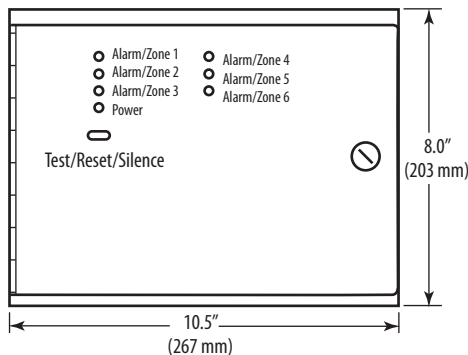

ORDERING INFORMATION

MODEL	MANUF. PART #	DESCRIPTION
U006-0080*	LD310*	Leak Panel, 1 zone, LED, 2 relay outputs
U006-0001**	LD1000**	Leak Panel/Remote Annunciator, 1 zone, supervised, relay output
U006-0036**	LDRA6**	Leak Panel, up to 6 zones, supervised, relay output, Modbus RTU
U006-0035	LC-KIT***	Leader cable kit for SC cables (connects from leak panel to SC or NSC cable)
U006-0037	WA-DC-05	Power Supply for LD300
U006-0084	PS-WA-DC-24	Power Supply for LD1000 and LDRA6

* Power supply not included; requires U006-0037 power supply.
** Power supply not included; requires U006-0084 power supply.
*** Included with LD310 and LD1000.

